GEEPHON



7/24 Digital Signage 500nit BNC-V Series

Geephon's BNC series smart displays feature a equal narrow bezel design, elevating aesthetics while maintaining clarity. Perfect for retail product and information displays, they adopt a higher-haze panel, reducing reflection and glare for a clear, immersive viewing experience. With vibrant colors and a slim profile, they effortlessly draw attention in any retail setting.

Versatile and widely applicable, they are ideal for supermarkets, banks, offices, malls, hotels, hospitals, and more.

BNC7523A-AA-05V



Optimal Visual Clarity

- · High-performance image processor.
- Delivers true color expression and high resolution.
- · Offers adjustable picture quality and white balance.



Enhanced Component Design

- · Lightweight design for easy handling.
- · Constructed with high-strength aluminum alloy for durability.
- · Modular components facilitate maintenance and replacement.



Seamless Wall Mounting (optional) • Geephon's special mounting brackets kit (optional) ensures

seamless and visually appealing equipment installation on walls.



Anti-reflection Anti-glare Surface • Higher haze panel

Simply insert the U disk for automatic content copying and

· Anti-reflection and anti-glare effects.

GPlay Convenient U disk

(((▶))) • Built-in Speaker

playback on the device upon booting



Fail Over Support



CMS / Remote Management Support (optional) Cloud-based remote management (CetusMSC) and CMS platform

- (GalaxyASC) support. Real-time monitoring of display status, parameters adjustment,
- and content distribution.
- Remote control via PC and Smart phone.



Open API & SDK Support and RS232 Compatible



· Landscape/Portrait Compatible · Portrait and landscape display orientations.

Fire Protection Certification



OTA Firmware Update

- Enables remote firmware and application updates.
- Designed for seamless upgrades.



Extended Product Warranty

- Engineered for long-term durability.
- Guarantees reliable 24/7 operation.
- Comprehensive warranty ensures customer satisfaction and confidence.

GEEPHON

Specification

Hardware Specification

Panel	IPS
Display Size	75 inch
Protection Glass	N/A
Protection Level	IP 5X (Front Panel)
Front Color	Black
Set Dimension (L*W*D)	1674.464 x 950.136 x 55.4mm
Bezel Width Width(mm)	9.9mm
Active Display Area(H*V)	1649.66 x 927.936mm
Resolution	3840 x 2160
Туре	60Hz E-LED BLU
Brightness(Typ.)	500 cd/m ²
Contrast Ratio(Typ.)	1200:1
Haze	25%
Viewing Angle(H/V)	178°(H) x 178°(V)(CR≥10)
Display Colors	1.07 G
Color Gamut	68%
Response Time	8ms (Typ)
Operation Hour	24/7
Smart Solution	PTC.DT1AHE-BAB
Connectivity	USB2.0*2, HDMI In*1, Ethernet(RJ45)*1, RS232(RJ45)*1, Line Out*1, Sensor*1, IR In*1
Power Input Supply	100-240V AC, 50/60Hz
Power Consumption	260W
Speaker	8W/8Ω *2
IR	External connection
Touch Technology	N/A
Camera	N/A
Installation	Wall mount
VESA Mount	400 x 500mm
Package(W*H*D)	1797 x 1076 x 180mm
Weight (kg)	N.W: 27kg G.W: 38kg
Operating Temperature	0°C~+40°C
Storage Temperature	-10°C~+60°C

System Specification

CPU	ARM Quad Core Cortex-A53 1.5G
GPU	ARM Mali-G52 2EE MC1
Operating System	Android 9
Cloud Advertising	Optional
Distribution System	Optional
Cloud Splice System	Optional
Memory	DDR 2G
Storage	EMMC 16GB
	Ethernet (RJ45)
Ethernet	WiFi 802.11b/g/n
	4G LTE(FDD/TDD)(Optional)
Panel Image Rotation	0/90/180/270/360 Angle Rotation
Video Decoder	MPEG-1/2/4,H.264,HEVC,VP8,VP9,AVS+,AVS2.AV1
Audio Decoder	MPEG-1.MPEG-2(layerl/ll),MP3,AAC-LC,HE-AAC
Picture Decoding	JPG,JPEG ,PNG ,BMP

What's in the box


Power Cable	x1 Power cord (based on region)
Remote Controller	x1
RS232 Adaptor	x1

Warranty

Warranty

Three year or by contract

Dimensions

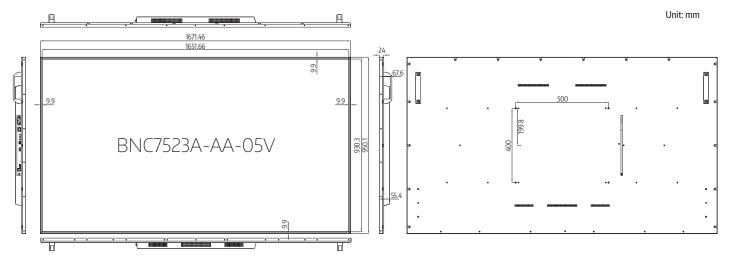

* Compatibility may differ by equipment.
* Software compatibility may change over time. Please contact your regional sales representative for details.
* Specifications are subject to change without notice, so please contact sales team to verify before ordering